



Power of Desire



**SOMANY**

Somany Ceramics Limited : Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: Office no. 7-14, 4th Floor, Aggarwal Mall, Opp. Sola Bhagwat Vidyapeeth, S.G. Road, Sola, Ph.: 079-66042500 to 599

Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913

www.somanyceramics.com | e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)



Visit us at:  
www.somanyceramics.com



Find us at:  
www.facebook.com/SomanyCeramic



Find us at:  
www.twitter.com/SomanyCeramic



Find us at:  
www.instagram.com/SomanyCeramics




MARVELA / CAT / DECEMBER 2022

MARVELA  
**FLORITUFF**

**SOMANY**  
Tiles | Bathware

**ZAMEEN SE JUDEY**

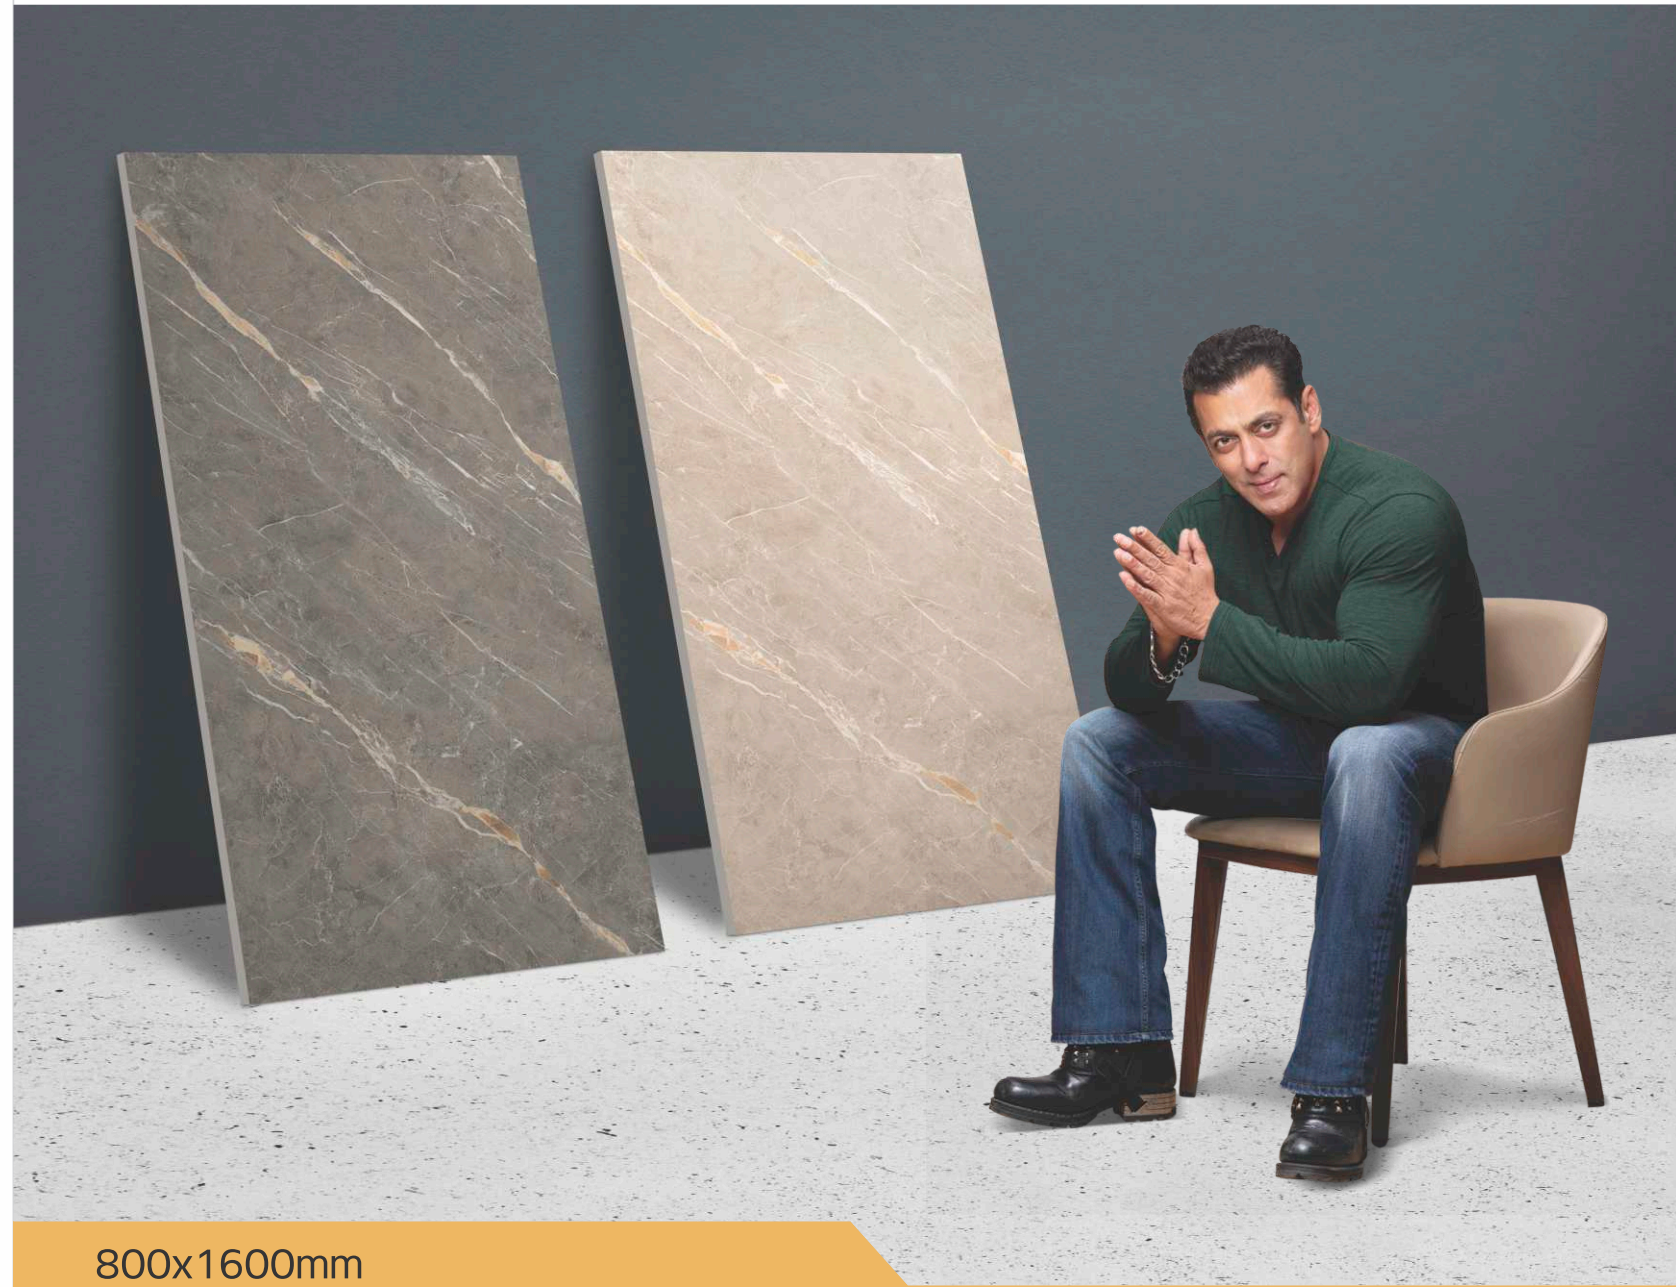

800x1600mm

**FLOOR TILES**  
COLLECTION

UNIT - 4 | FOR SOUTH


# NATURAL MARVELS FOR A WONDERFUL ABODE

The new range of "Marvela" tiles by Somany is a fusion of elegance & grace. Inspired from Indian, Turkish & Italian marble which offers plethora of designs, that can be marveled into natural masterpieces.

Available in various sizes of 800x1600mm, these are high definition digital polished tiles that provide gleaming mirror like finish. Complimented with designs that caters to both wall & floor, Marvela is also the toughest tile in its category.

With a wide range of textures, finishes, designs & sizes, Marvela is here to add absolute mix of sophistication & opulence lending a sheer bliss to ones's abode.

**NEW ARRIVAL**

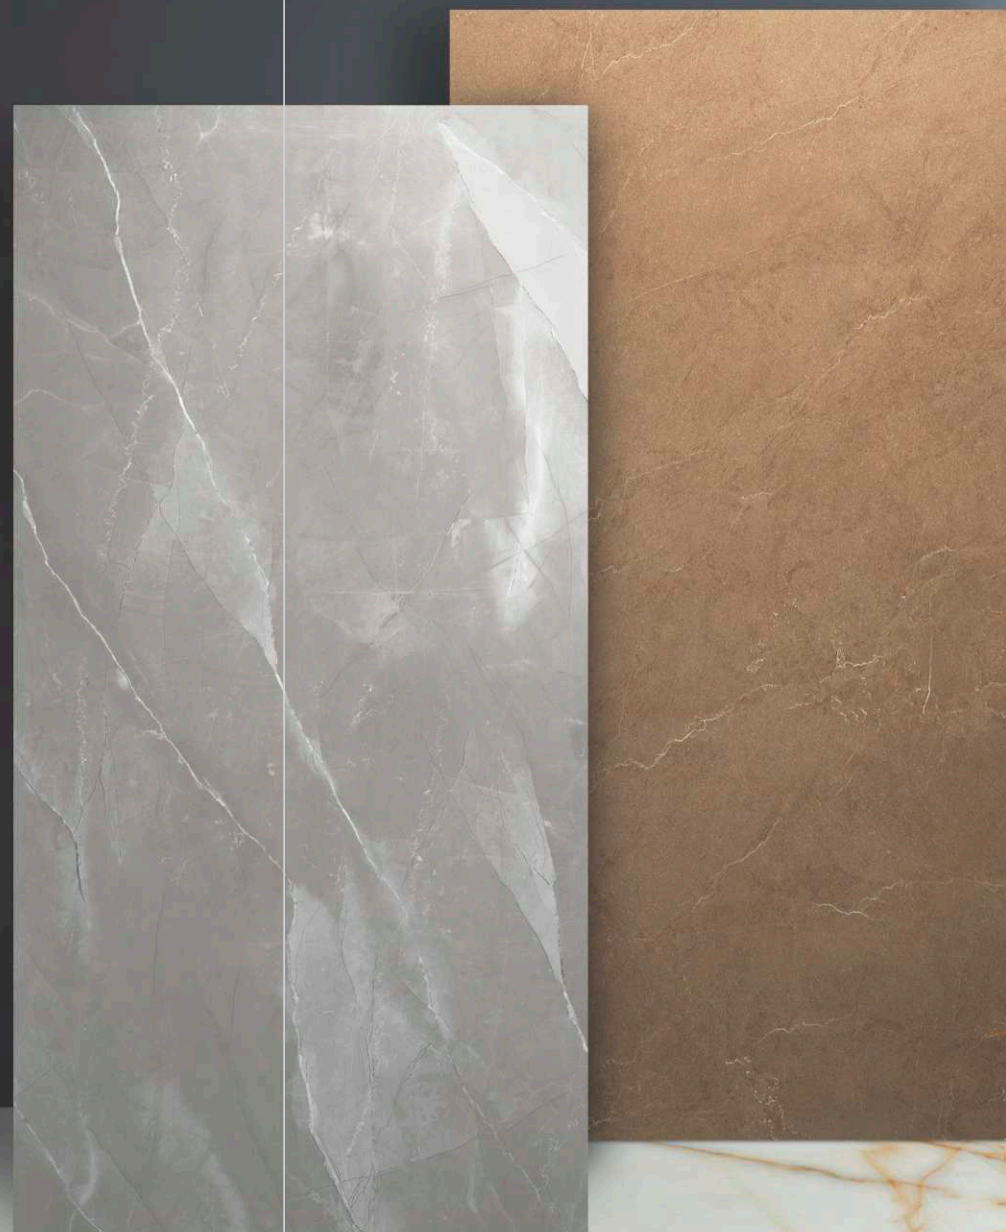

## ADVANCE TECHNICAL FEATURE



PERFECTLY FLAT



EASY TO CLEAN



HYGIENIC



LIGHT WEIGHT EASILY  
HANDLED TILES



RESISTANCE TO CHEMICALS



BENDING STRENGTH



EASY TO INSTALL



TIGRAN ODINE COFFEE CR

800x1600mm


CARVING FINISH



TIGRAN ECLECTIC BIANCO CR



TIGRAN ODINE COFFEE CR

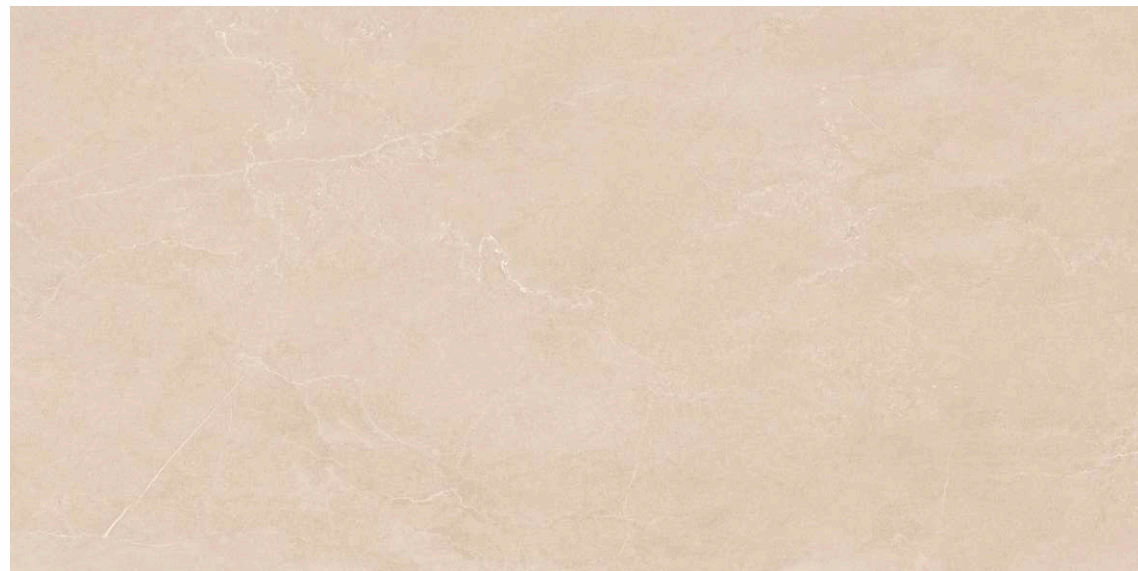

TIGRAN ODINE BEIGE CR



TIGRAN ODINE GREY CR








TIGRAN ALPI BEIGE FP  
V4   



TIGRAN CRAFTER DARK FP  
V2   



TIGRAN ALPI BRONZE FP  
V4   



TIGRAN CRAFTER LIGHT FP  
V2   






TIGRAN DELICE BEIGE FP



TIGRAN DELICE BEIGE FP

V2   

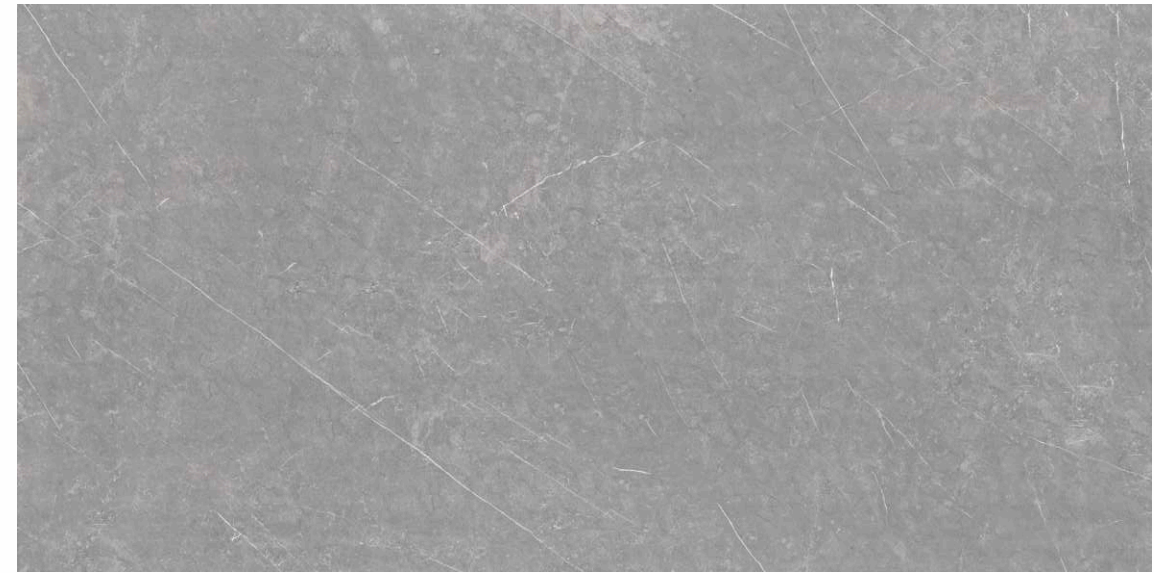

TIGRAN DELICE GREY DARK FP

V2   



TIGRAN DELICE CREMA FP


V2   








TIGRAN DELICE GREY LIGHT FP

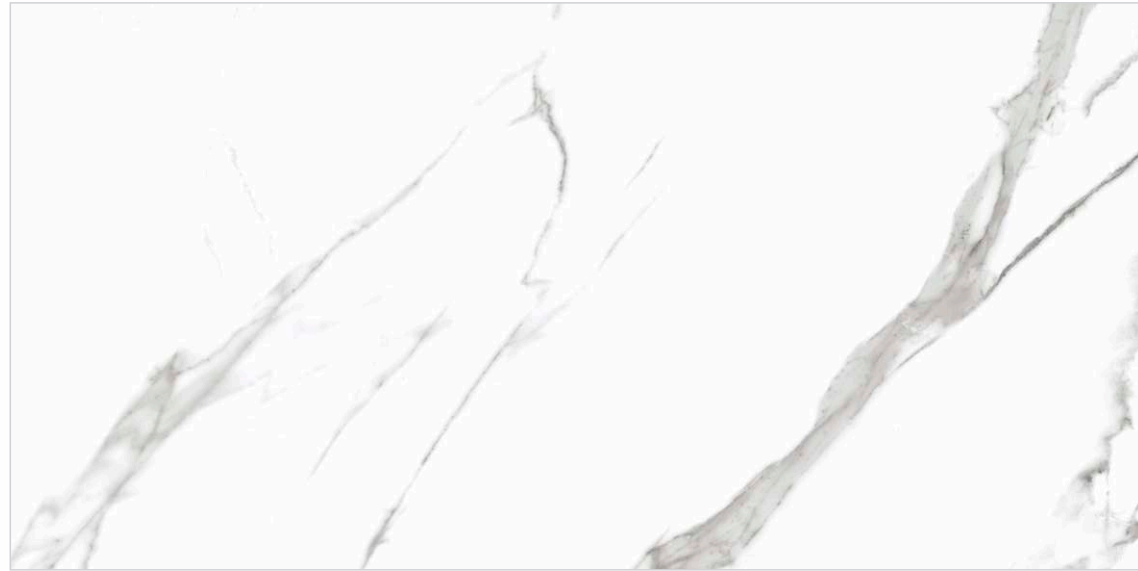V2   







TIGRAN CROCE STATURIO FP  
V2    

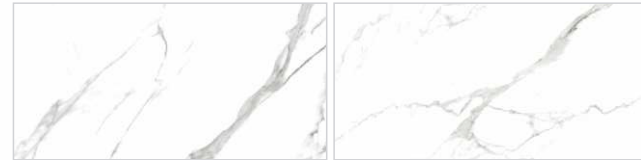

TIGRAN GIOTTO BEIGE FP  
V2    

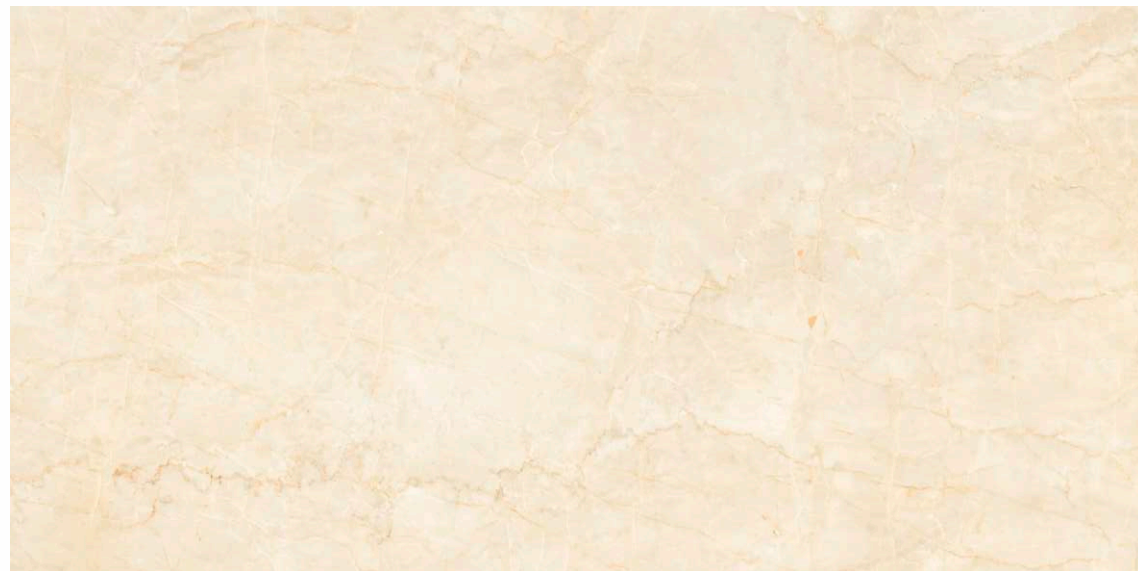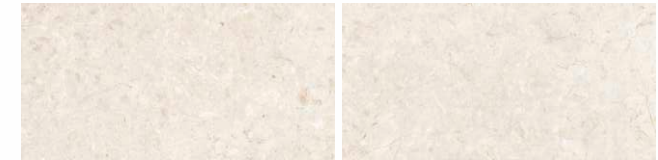

TIGRAN GALWAY BEIGE FP  
V2    



TIGRAN GIOTTO BROWN FP  
V2    









TIGRAN GOYA BEIGE FP  
V2   



TIGRAN LETO GREY LIGHT FP  
V2   

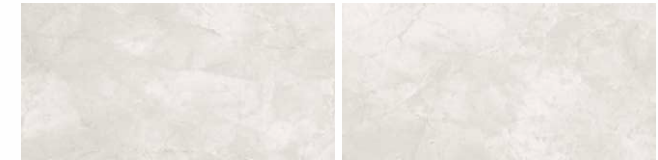

TIGRAN LETO GREY DARK FP  
V2   

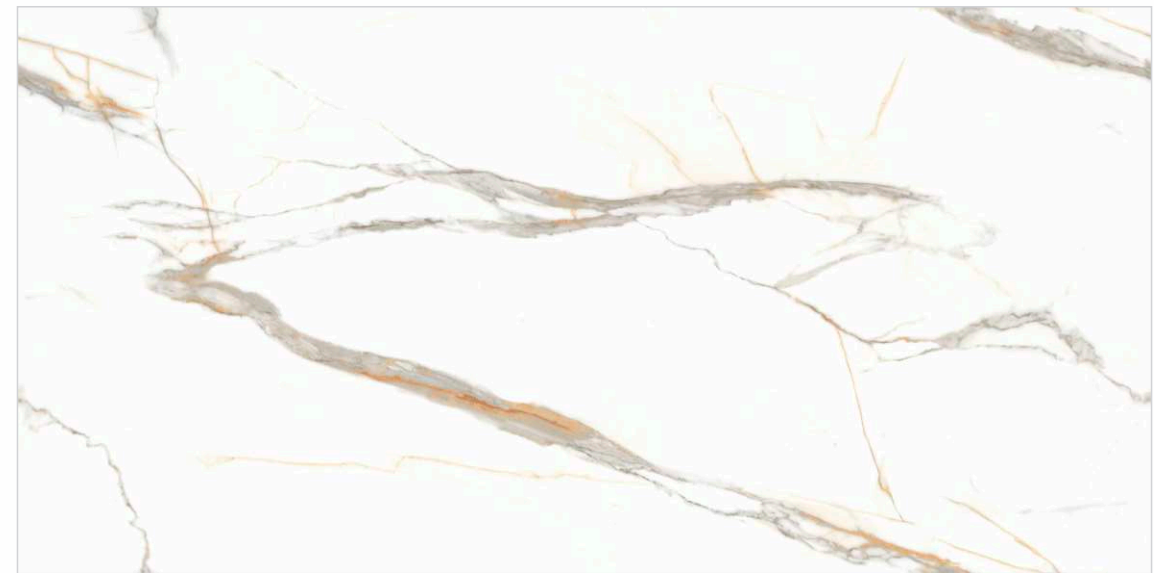

TIGRAN LINZ STATURIO FP  
V3   






TIGRAN ODYSSEY BEIGE FP



TIGRAN ODYSSEY BEIGE FP

V3    

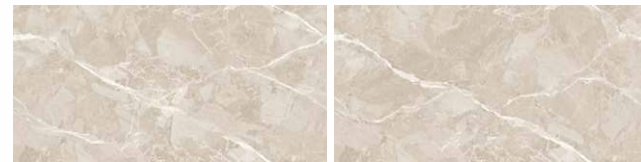


TIGRAN ORESTE BEIGE FP

V2    



TIGRAN ODYSSEY GREY FP

V3    

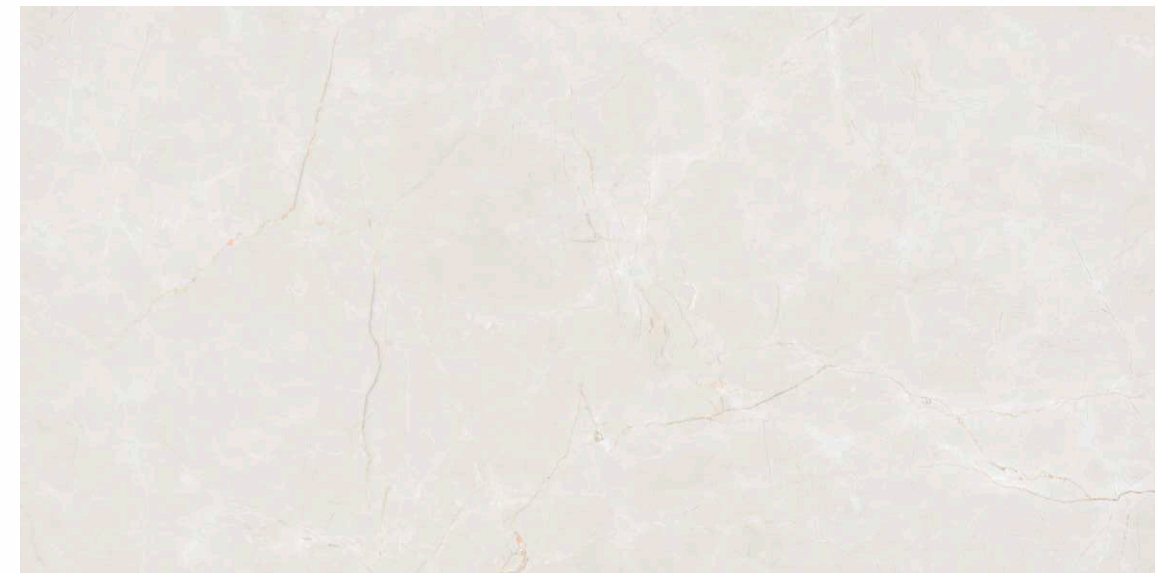

TIGRAN SABINE BIANCO FP

V2    





TIGRAN SAN REMO GRIS FP



**PACKING DETAIL FOR UNIT-4 MARVELA TILES**

Nominal Size	Thickness (mm)	Av. Wt. per carton (Kg)	No. of Tiles per carton	Coverage area per carton
800X1600mm (Tigran Series)	8.7 - 9.1mm (Approx)	52.00 Kgs.	2	2.56sq.mtr./27.55sq.ft.

Requirement as per  
ISO 13006:2018 ≤ 0.5%  
Group B I a

**TECHNICAL SPECIFICATION FOR UNIT-4 MARVELA TILES**

Characteristics		Requirement as per IS 15622:2017 0.08 < E ≤ 3% Group B I b	Requirement as per ISO 13006:2018 0.5 ≤ E ≤ 3% Group B I b	Our Value	Test Method
<b>A</b>	<b>Dimension &amp; Surface Quality</b>				
I	Length & Width	±0.10%	±0.3%	± 0.10%	IS 13630 Part 1/ISO 10545-2
ii	Thickness	± 5.0 %	± 5.0%	± 4.0%	
iii	Straightness of Side	± 0.10%	±0.3%	± 0.10%	
iv	Rectangularity	± 0.10%	±0.3%	± 0.10%	
v	Surface Flatness				
a	Center curvature (%) (max.Deviation)	± 0.5 %	±0.4%	± 0.20%	
b	Edge curvature (%) ( max.Deviation)	± 0.5 %	±0.4%	± 0.20%	
c	Corner warpage (%) ( max.Deviation)	± 0.5 %	±0.4%	± 0.2%	
vi	Surface Quality	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	Min. 95 % of tiles will be free from visible defects	
<b>B</b>	<b>Physical Properties</b>				
I	Water Absorption (%)	Av. 0.08< E ≤ 3 %, Individual 3.3 max	Av. 0.5< E ≤ 3 %, Individual 3.3 max	Avg. E ≤ 3.0 %	IS 13630 Part 2/ISO 10545-3
ii	Modulus of Rupture [N/mm <sup>2</sup> ]	Avg. 30, Individual 27 Min	Avg. 30, Individual 27 Min	Avg. > 30	IS 13630 Part 6/ISO 10545-4
iii	Breaking Strength in N	Min. 1100	Min. 1100	Min. 1100	
iv	Moisture Expansion in mm/m	0.02	Test Method Available	0.02	IS 13630 Part 3/ISO-10545-10
v	Scratch Hardness of surface (Mohs)	Min 5	N.A	Min.5 (for Matt), Min.3 (for Polished)	IS 13630 Part 13
vi	Resistance to Abrasion of glazed tiles( Class I to V )	Min II	Abrasion Class & Cycle passed	Class-V(for Matt), Class-III(for Polished)	IS 13630 Part 11/ISO 10545-7
vii	Coefficient of linear thermal expansion from ambient temperature to 100 0 C	7 X 10 <sup>-6</sup> K <sup>-1</sup> max	Test Method Available	Max 6 X 10 <sup>-6</sup> K <sup>-1</sup> Max	IS 13630 Part 4/ISO 10545-8
viii	Thermal Shock Resistance	10 cycle min	Test Method Available	10 cycle passed	IS 13630 Part 5/ISO-10545-9
ix	Crazing Resistance	4 cycle @ 7.5bar min	Required	4 cycle passed	IS 13630 Part 9/ISO 10545-11
x	Impact Resistance as Co-efficient of Restitution (COR)	0.55 Min	Test Method Available	Min 0.55	IS 13630 Part-14/ISO 10545-5
xi	Forst resistance	Required	Required	100 cycle passed	IS 13630 Part 10/ISO 10545-12
<b>C</b>	<b>Chemical Resistance (glazed Tiles)</b>				
I	Stain Resistance	Min Class 1	Min Class 3	Min Class-1(For Matt), Min Class-2( for Polished)	IS 13630 Part 8 & ISO 10545-14
ii	Resistance to household chemicals	Min Class AA	Min B	Min Class AA	
iii	Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Declared Value <sup>1</sup>	Min Class AA	IS 13630 Part 8/ISO 10545-13

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see physical sample before placing the order. Technical Specifications for Somany Wall & Floor Tiles are applicable only for premium quality tiles. Please inspect all tiles prior to installation, company will not entertain complaints, once the tiles are laid/fixd. Complaints will not be entertained for Borders, Highlighters & Motifs.