









Somany Ceramics Limited: Noida: F-36, Sector-6; Ph.: 0120-4627900.

Ahmedabad: Office no. 7-14, 4th Floor, Aggarwal Mall, Opp. Sola Bhagwat Vidyapeeth, S.G. Road, Sola, Ph.: 079-66042500 to 599

Registered office: 2, Red Cross Place, Kolkata - 700001; Ph.(033) 22487406/5913 www.somanyceramics.com I e-mail marketing@somanyceramics.com

Toll Free No. 1800-103-0004 (Timing-10:00am to 6:30pm; Mon-Fri)












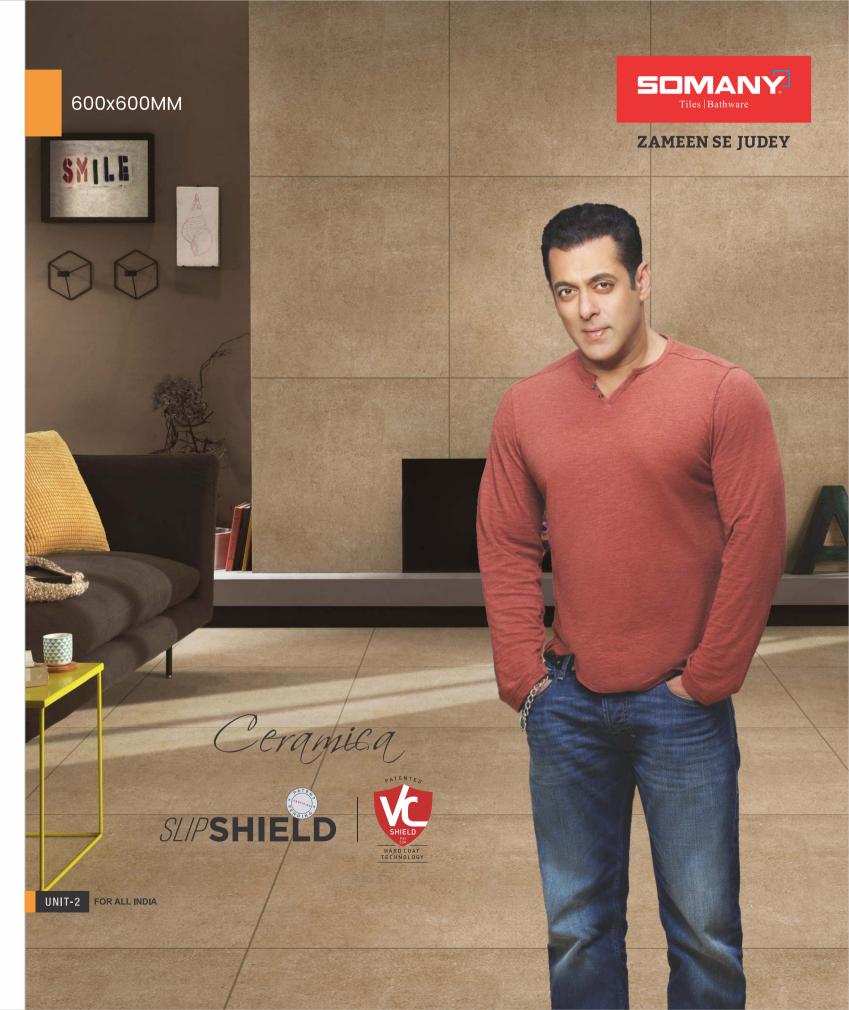


Ceramica

Versatile, durable and stylish, Ceramic floor tiles from the house of Somany plays an integral part in your home décor. Being stain and water resistant and renowned for their longevity and easy maintenance, they keep your space looking elegant and bright for years to come. Whether kitchen or bathroom, Living room or Bedroom, we've got a wide selection of quality ceramic tiles for you to choose from when you are designing your home!


With wide range of textures, finishes, designs & sizes, Somany range of floor tiles are here to add absolute mix of sophistication & opulence lending a sheer bliss to one's abode.

FLOOR TILES COLLECTION

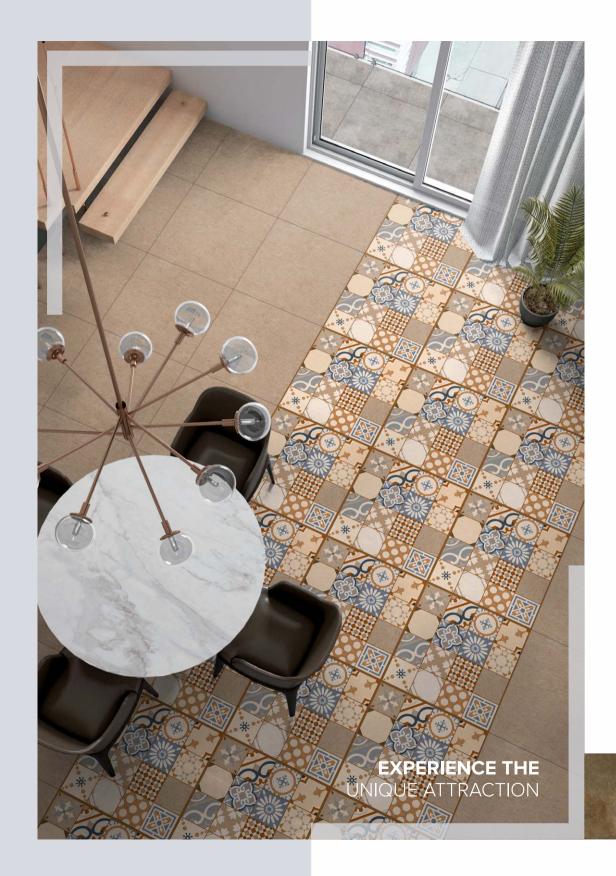

Index

SUPSHIELD	Page N
Ceramica COLLECTION	12
Ceramica WOODEN COLLECTION	28

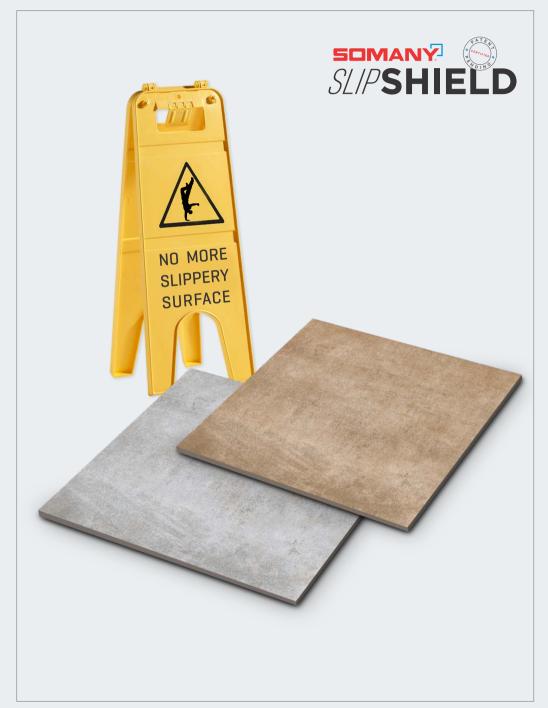

COLLECTION **TILES**



Taking forward the tradition of innovation in tiles, Somany presents "Slip Shield" floor tiles in which a coating is applied on the tiles which keeps the co-efficient of friction high even when the surface is wet and soapy(*ramp value>R11). This preempts any possibility of slipping. Furthermore, the coating allows for limitless design possibilities, making Somany Slip Shield tiles well suited to liven-up frequently wet areas in homes, as also high traffic areas like malls and restaurants.

Somany Slip Shield tiles are also resistant to graze and blemish and hence lend a sense of timelessness to the design. While being highly functional in nature and easy to maintain, the tiles create a distinctive ambience and "feel" even to utility areas.

Somany Slip Shield tiles have been independently tested and certified by the Ceramic Research Company, Malaysia, which the foremost independent institution in the world for scientific research in physical, chemical & thermal properties of ceramic products.















www.somanyceramics.com









V3 HD 1

V3 HD 1

V3 HD 1





Aegis Brown Matt, 600x600mm





Aegis Nero Matt, 600x600mm




V3 HD 1



Champion Blanco Matt, 600x600mm





Champion Crema Matt, 600x600mm



Champion Grey Matt, 600x600mm





Champion Nero Matt, 600x600mm





HD Armor Blue Matt, 600x600mm





HD Fence Brown Matt, 600x600mm



HD Fence Crema Matt, 600x600mm





Aegis Grey Matt, 600x600mm



















HD Fence Grey Matt, 600x600mm





HD Fence Nero Matt, 600x600mm





Ridge Moka Matt, 600x600mm





CERAMIC

- FLOOR TILES COLLECTION













Marble Interpret the Classic Elegance

When it comes to timeless style, you just can't beat marble! Marble inspired accents are a great way to achieve a beautiful natural feature in new builds or renovations. Capturing the inherent natural beauty of this coveted natural stone, this textured tile covers the whole spectrum of veining, coloring and textures. Cool, rich and elegant, it stands distinguished among tile flooring with a variety of colors from grey to cream-colored, with contrasting veins that deliver a unique appearance. Marble tiles can have multiple finishes from polished to honed, and brushed to tumbled. Whether you combine similar or contrasting tones, this tile will instantly elevate the image of any room.

The classic high end look of marble is now for everyone to flaunt. And our ceramic tiles from the house of Somany in every imaginable format are ready to deliver



www.somanyceramics.com















Almstone Natural Matt, 600x600mm





Alvis Matt, 600x600mm



Aruba Crema Matt, 600x600mm



Bistro Crema V1 HD 1 Matt, 600x600mm





Boulevard Grey Matt, 600x600mm



Boulevard Gris Matt, 600x600mm





Canadian Gold Matt, 600x600mm



V3 HD 1



Cellostone Crema Matt, 600x600mm





Crema Marfil Matt, 600x600mm




Fairline Matt, 600x600mm










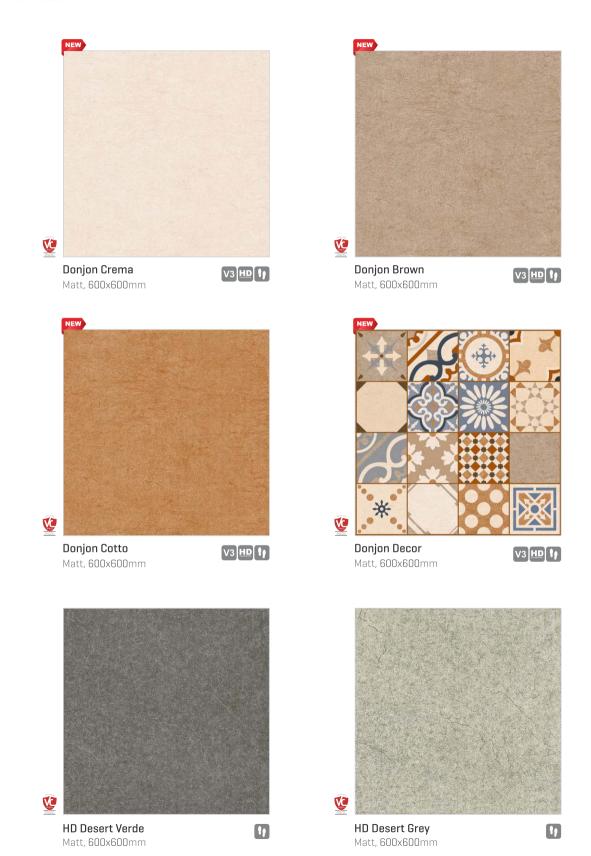

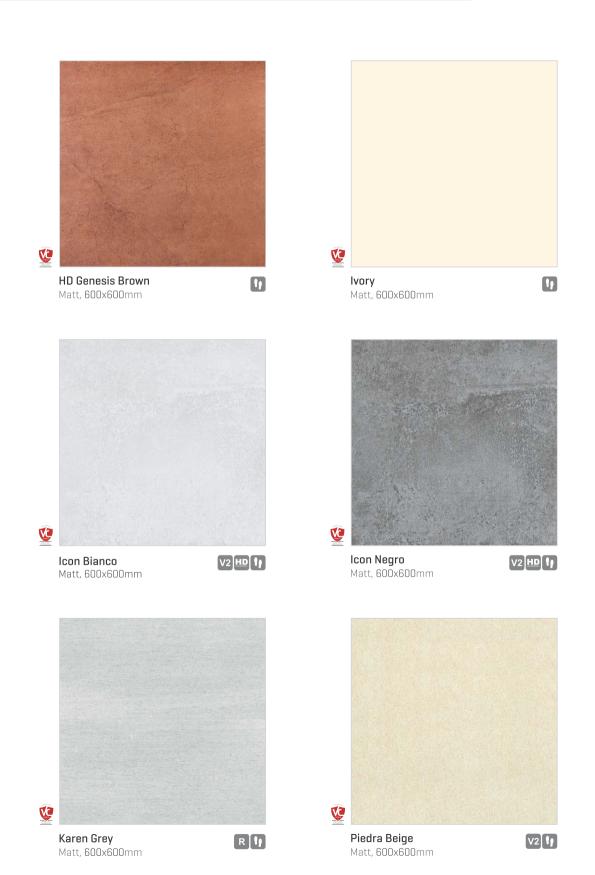









Ŋ

t

23



V2 1





Piedra Moka Matt, 600x600mm






Piedra Nero Matt, 600x600mm



Ruby Rust Matt, 600x600mm






t

Snow White Matt, 600x600mm







11

t

11

Elite Verde Matt, 600x600mm



Elite Nero



Elite Natural Matt, 600x600mm



11 Matt, 600x600mm



Matt, 600x600mm









Matt, 600x600mm



11



















Delight Coffee

Matt, 600x600mm

t



















Matt, 600x600mm




V3 11

Ortaggi Grey Matt, 600x600mm







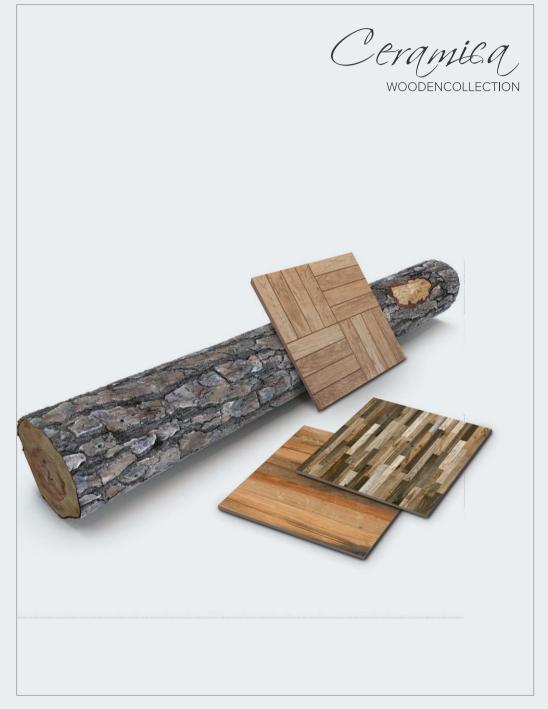

COLLECTION TILES



Tiles made of wood or wood look-like tiles? Keep people quessing with this awesome range of tiles with wooden finish. While the admirers will keep coming in - your tiles will be as good as new. Antislip features with great design patterns that look like wooden floor boards or planks - these tiles will dominate your space with cool looks. With dirt resistant surface, they are easy to maintain. Additionally, the design doesn't come off easily due to several coatings on the original design. You can rest easy with the wood feel.























V3 HD 1

Eastern Wood Cherry Matt, 600x600mm



Essenze Natural Matt, 600x600mm





Havana Roble Matt, 600x600mm



Magic Wood Matt, 600x600mm





Magic Wood Wenge Matt, 600x600mm





Maxiwood Matt, 600x600mm









Meranti Teca Matt, 600x600mm





Scavo Wood Matt, 600x600mm





Vena Pine Matt, 600x600mm

V2 1











Classic Wood Haya Rustic, 600x600mm



Edra Teak Rustic, 600x600mm






t

HD Check Wood Cherry Matt, 600x600mm

HD Newland Nut

Matt, 600x600mm



HD Check Wood Coffee Matt, 600x600mm

HD Newland Cherry Matt, 600x600mm



If



HD Plot Wood Cherry Matt, 600x600mm



HD Stroke Cherry Matt, 600x600mm



ty

37

Plot Wood Gris Matt, 600x600mm



HD Wood land Matt, 600x600mm



Spruce Rustic, 600x600mm






DESIGN, PATTERN & SHADE VARIATION GUIDE

Current development efforts have made ceramic tiles to resemble and look authentically identical to natural material (Stone, Wood, Fabric), and it has become increasingly difficult in many cases, to distinguish between two.

Recognising this situation, it is necessary to be informed on the grade of design & pattern variationthatis expected from the seproducts. As a general reference, the design & Pattern guide below classifies a scale of ranges according to the degree of variation.




V1 Uniform Appearance



V2





Slight Variation V3 Moderate Variation

The classification is as follow:

✓ Minimal Variation ✓ Random Variation ✓ Slight Variation ✓ Substantial Variation



High Definition Image

While laying the tiles please follow the arrow on the back of the tiles. For removing the wax from the surface of the tiles please use the soft cotton cloth for rubbing with any boric/talk powder



VEILCRAFT (VC) SHIELD

Not only look and style; the buzz word for the Gen X tile is timeless elegance. Here comes the revolutionary patented "VeilCraft (VC) Shield" technology, a 'high abrasion resistant glaze composition', known as VC (VeilCraft) Shield. This is the first ever patented technology in Indian Ceramic Industry. This not only gives you the perfect aesthetics for your space but also the lifelong protection to your floor.

Result Of The abrasion test at 25,000 revolutions as per the PEI Methodology

Traditional Tile












VC Shield Tile



Polished Vitrified Tile

Patent Certificate for "High Abrasion Resistant Glaze" applied on VC Shield Tiles







Technical Specification for 600 x 600mm Tiles										
	Characteristics	Requirement As Per IS 15622 :2017 Table-7 3 < E ≤ 6 Group B IIa	Requirement as per ISO-13006:2018 Annex –J , 3 <e≤6 blla<="" group="" th=""><th>Our Value for 600x600mm Tiles</th><th>Our Value for 600 X 600 mm Rectified (Non VC)</th><th>Our Value for 600 X 600 mm Rectified (Slip shield)</th><th colspan="2">Test Meth</th><th>nod</th></e≤6>	Our Value for 600x600mm Tiles	Our Value for 600 X 600 mm Rectified (Non VC)	Our Value for 600 X 600 mm Rectified (Slip shield)	Test Meth		nod	
Α	Dimension & Surface Quality						EN	IS 13630	ISO 10545	
I	Length & Width	±0.10%	±0.3%	± 0.10%	± 0.10%	± 0.10%				
ii	Thickness	± 5.0 %	± 5.0%	± 4.0%	± 4.0%	± 4.0%		Part 1	2	
iii	Straightness of Side	± 0.10%	± 0.30%	± 0.10%	± 0.10%	± 0.10%				
iv	Rectengularity	± 0.10%	± 0.30%	± 0.10%	± 0.10%	± 0.10%				
v	Surface Flatness						98			
а	Center curvature (%) (max.Deviation)	± 0.5 %	± 0.4%	± 0.2%	± 0.2%	± 0.2%	30			
b	Edge curvature (%) (max.Deviation)	± 0.5 %	± 0.4%	± 0.2%	± 0.2%	± 0.2%				
С	Corner warpage (%)(max.Deviation)	± 0.5 %	± 0.4%	± 0.2%	± 0.2%	± 0.2%				
vi	Surface Quality	Min. 95 % of tiles will be free from visible defects	95 % of tiles will be free from visible defects	f	95 % of tiles will be ree from visible defect	:s				
В	Physical Properties									
ı	Water Absorption (%)	Average 3 <e≤6, Individual Maximum 6.2</e≤6, 	3 <e≤6, 6.5<="" individual="" max="" td=""><td>5.5 ± 0.5</td><td>5.5 ± 0.5</td><td>5.5 ± 0.5</td><td>99</td><td>Part 2</td><td>3</td></e≤6,>	5.5 ± 0.5	5.5 ± 0.5	5.5 ± 0.5	99	Part 2	3	
ii	Modulus of Rupture [N/mm2]	Avg 22 Individual 20 min	Av 22, Individual 20 min	Min 28	Min 28	Min 28	100			
iii	Breaking Strength in N	Min.1000	Not less than 1000	Min. 1100	Min. 1100	Min. 1100	100	Part 6	4	
iv	Moisture Expansion in mm/m	0.03 max	N.A	0.03 max	0.03 max	0.03 max	155	Part 3	10	
V	Scratch Hardness of surface (Mohs)	Min 4	N.A	Min 5 Depending on Surface	Min 5 Depending on Surface	Min 5 Depending on Surface	101	Part 13		
vi	Resistance to Abrasion of glazed tiles(Class I to V)	Commercial application Min IV, Home Application Min II	Report Abrasion Class & Cycle Passed	PEI-V (25000 Revolution	PEI-IV (5000 Revolution	PEI-IV	154	Part 11	7	
vii	Coefficient of linear thermal expansion from embiant temperature to 100 0 C	9 X10 ⁻⁸ K ⁻¹ max	Test Method Available	9 X10 ⁻⁶ K ⁻¹ max	9 X10 ⁻⁶ K ⁻¹ max	9 X10 ⁻⁶ K ⁻¹ max	103	Part 4	8	
riii	Thermal Shock Resistance	10 cycle min	Test Method Available	Passed 10 Cycle	Passed 10 Cycle	Passed 10 Cycle	104	Part 5	9	
ix	Crazing Resistance	4 cycle @ 7.5bar min	Required	Passed 4 Cycle	Passed 4 Cycle	Passed 4 Cycle	104	Part 9	11	
x	Forst resistance	Required , if agreed	Test Method Available	Resistance	Resistance	Resistance	202	Part 10	12	
xi	Impact Resistance	N.A.	Test Method Available	N.A.	N.A.	N.A.		Part 14	5	
С	Chemical Resistance (glazed Tiles)									
	Stain Resistance	Min Class-1	Min Class-3	Min Class-1	Min Class-1	Min Class-1				
ii	Resistance to household chemicals	Min Class AA	Min Class B	Min Class AA	Min Class AA	Min Class AA		Part 8	13 / 1	
iii	Resistance to acids and alkalis (with exception of hydrofluoric acid and its compounds)	Required if agreed	Manufacturer to state classification	Min Class AA	Min Class AA	Min Class AA				
С	Slip Shield Properties									
I	The coefficient of friction value	N.A.	N.A.	N.A.	N.A.	@ R11 (19 to 27)				

PACKAGING DETAIL for 600 x 600mm Tiles								
Nominal Size	Thickness (mm)	Av. Wt. per carton (Kg)	No. of Tiles per carton	Coverage area per carton				
600X600 mm Slip Shield	9.0 (+/- 0.20)	26.5~27.0 Kg.	4	1.44 Sq.Mt / 15.505 Sq.Ft.				
600X600 mm Ceramic	9.0 (+/- 0.20)	26.5~27.0 Kg.	4	1.44 Sq.Mt / 15.505 Sq.Ft.				

The reproduction of tiles in this catalogue is restricted to four color printing only and tiles are not in relative sizes, therefore customers are advised to see physical sample before placing the order. Technical Specifications for Somany Wall & Floor Tiles are applicable only for standard quality tiles. Please inspect all tiles prior to installation, company will not entertain complaints, once the tiles are laid/fixed. Complaints will not be entertained for Borders, Highlighters & Motifs.